

TORINO HIGHBAY



Tek yüzlü, Sıvaüstü montaj
Surface mounted, single sided




Özellikler

- *ABS gövde üzeri PC şeffaf kapak
- *Sıvaaltı(Ankastre) veya sıvaüstü montaj
- *Tüm aksesuarları ile kolay montaj standart
- *Şekillerde serigrafı baskılı etiket

Features

- *PC clear diffuser covered ABS body
- *Easy to install ceiling or wall surface-mounted
- *Easy installation with all accessory
- *Standard pressed or sticker with pictogram shape

ATH

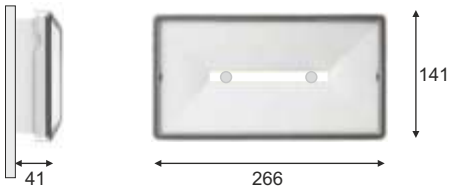

Teknik Bilgiler

Technical Data

Çalışma gerilimi	Working voltage	: 220 - 230 V AC 50/60Hz ±%10
Şebekeden çekilen güç	Mains supply power	: 3W, 5W
Şarj süresi	Charge duration	: 24 h (first use:48h)
Acilde ışık çıkış gücü	Emg.Light output power	: 2...5W
Çalışma sıcaklığı	Amp.temp.	: -5°C . . 45°C
Gövde sıcaklığı	Case temp.	: 75°C
Koruma Sınıfı	Protection grade	: IP65
Elektrik Sınıfı	Electrical classification	: II

Standartlar

Standards



EN 60598-1, EN 60598-2-22, EN 62034, EN 61347-1
EMC-2004/108/EC, LVD-2006/95/EC
TUV, CE, EAC, TSE

Opsiyonel

Optional

Dali otomasyon sistemi
Merkezi Batarya sistemi

Automation system for DALI
Central battery (slave type)

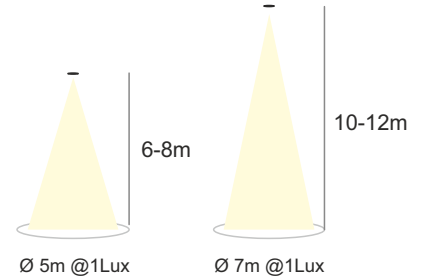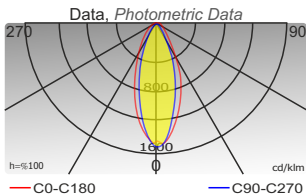

Aksesuar / Accessuary

Kablo tavası montaj parçası, Mounting bracket for cable tray
AATA 170x40mm, 280gr.



Code	Type	Duration	Battery	Flux	Dimension	Weight
ATH N3 ..	Non-Maintained 2W Led	3h	Li-Ion - 3.7V 2000mAh	240lm	266x141x41	470gr.
ATH N5 ..	Non-Maintained 2x2W Led	3h	Li-Ion - 2x3.7V 2000mAh	400lm	266x141x41	560gr.
ATH D3 ..	DALI Non-Maintained 2W Led	3h	LiFePO4 - 3.2V 2000mAh	200lm	266x141x41	550gr.
ATH D5 ..	DALI Non-Maintained 4W Led	3h	LiFePO4 - 3.2V 4000mAh	400lm	266x141x41	600gr.
ATH CA5 ..	Non-Maintained 5W Led	CB	Central Battery - 24V DC	490lm	266x141x41	450gr.
ATH CB5 ..	Non-Maintained 5W Led	CB	Central Battery - 216V DC	490lm	266x141x41	400gr.
ATH CA8 ..	Non-Maintained 8W Led	CB	Central Battery - 24V DC	800lm	266x141x41	450gr.
ATH CB8 ..	Non-Maintained 8W Led	CB	Central Battery - 216V DC	800lm	266x141x41	400gr.